



High-Speed Bandwidth Sharing and Complete Firewall in a Box

Benefits

All-in-One Hotspot Gateway

ZyXEL G-4100 v2 is an all-in-one hotspot gateway that provides secure free or charged Internet access according to business policies. It provides authentication and accounting function for both wireless and wired clients, and supports up to 100 concurrent users. The G-4100 v2 work with SP-200E statement printer to generate and print tickets with account, password, and pre-configured time for Internet access hours automatically through a few button clicks on SP-200E. All functions required for hotspot services are self-contained in the G-4100 v2.

Scalable, Easy-to-Manage User Authentication and Accounting

With an easy-configuration authentication server embedded in the G-4100 v2, no additional hardware or software are required for hotspot operators such as coffee shops, book stores, hotels or resorts to offer Internet services. The G-4100 v2 also supports RADIUS server for large-scale hotspot service deployments in chain stores or airport terminals to provide roaming service from one spot to another through centralized authentication and accounting features.

Best Hotspot User Experience with Security and Privacy

To provide the best hotspot user experience, the G-4100 v2 features rich networking functions such as IP PnP, DHCP server, NAT, MAC address and IP address filtering. The IP PnP technology enables the ultimate "zero configuration" user experience by taking care of the IP networking transparently, which dramatically improves user satisfaction and reduces technical support needs. User no longer needs to change the IP address, subnet mask, default gateway, Web proxy and even SMTP server settings. Moreover, V-LAN security for wired and wireless client, NAT, Layer 2 isolation, as well as MAC and IP address filtering technologies also work behind the scene to ensure protected user privacy, keeping sensitive personal data from being exposed to the public.

Tailor-Made Hotspot Gateway

With powerful marketing features built into the G-4100 v2, operators can customize the login page, redirect user to advertisement links, or provide limited Internet access to the designated home page. Additionally, powerful management features such as SSL login page, secure remote function, LAN and WLAN device management are all specifically designed for hotspot offerings. For easy deployment, the G-4100 v2 support PoE and the PoE-capable SP-200E statement printer, so the hotspot solution can be freely placed regardless of the power outlet location. The G-4100 v2 is not only a gateway tailor-made for hotspot deployments, but also customizable to fit business and service needs.

- Integrated Hotspot service
- Scalable User Authentication and Accounting
- Rich Networking Functions
- Customized Login Page, Advertisement URL Link and Walled Garden Features



802.11g Wireless
Hot Spot Gateway

G-4100 v2

Specifications

IP Plug and Play (iPNP technology)

- Easy-to-Use, Zero Configuration IP Plug and Play Internet Access

Rich Networking Functions

- NAT
- Outgoing SMTP Server Redirection
- DNS Redirection
- Various WAN connections (Static IP/DHCP Client/PPPoE/PPTP)
- DHCP Server
- Transparent HTTP Proxy
- NTP (Network Time Protocol) support

User Authentication and Accounting

- Supports up to 100 concurrent users
- Web-based Authentication
- Idle-timeout Control

Security and Firewall

- Layer 2 Isolation Security
- SSL Login Page and Administration
- VPN (IPSec/PPTP/L2TP) Pass through
- Pass through IP and MAC Address
- Custom SSL Certificate
- Administration Access Control

Management

- Web-based management tool
- TFTP/HTTP firmware upgrade
- Central scheduled firmware upgrade

- Backup/Restore Configuration file
- WLAN/LAN devices Management
- Devices Status Monitor
- Session List
- Syslog Messaging System
- Default printer (SP-200E) support

Marketing Cooperation

- Passthrough IP/MAC/URL
- Custom Login Page
- Login Page Redirect
- Advertisement URL link
- Walled garden
- Portal page redirection

Hardware Specifications

Network Specification

- IEEE802.3 10BaseT Ethernet
- IEEE802.3u 100BaseTX Fast Ethernet
- IEEE802.11g Wireless LAN

Compatibility

- Communicate with Wi-Fi certificated wireless adapters

Connectors

- 4 LAN Ports and One WAN Port
- 10/100BaseTX with auto MDI/MDI-X
- RS-232 port (For debugging and testing purpose only)

Wireless Operation Range

- Open Space: 100~300m
- Indoors: 35~100m

Wireless Data Rate

- Up to 54 Mbps with auto fallback with 802.11b

Encryption

- WEP 64/128, WPA/WPA2-PSK, WPA/WPA2 Enterprise, WPA/WPA2 Mixed Mode

Physical Specifications

External Antenna Type

- 2dBi (Max) Dual detachable diversity antenna with reverse SMA connector

Power Requirement

- External Power Adapter
 - Input: 100-240 VAC, 50/60 Hz, 0.35 A
 - Output: 5V, 2A
- POE
- Dimensions: 212.5 (W) x 138.5 (D) x 52.0 (H) mm
- Weight: 508 g

LED Indicators


- One POWER LED
- One WAN Link/Activity LED
- Four LAN Link/Activity LEDs
- One Sys LED
- One Blue Wireless Link/Activity LED

Environmental Specifications

Environment Conditions

- Operating Temperature: 0°C ~ 50°C
- Storage Temperature: -30°C ~ 60°C
- Humidity: Max. 90% non-condensing

Application Diagram

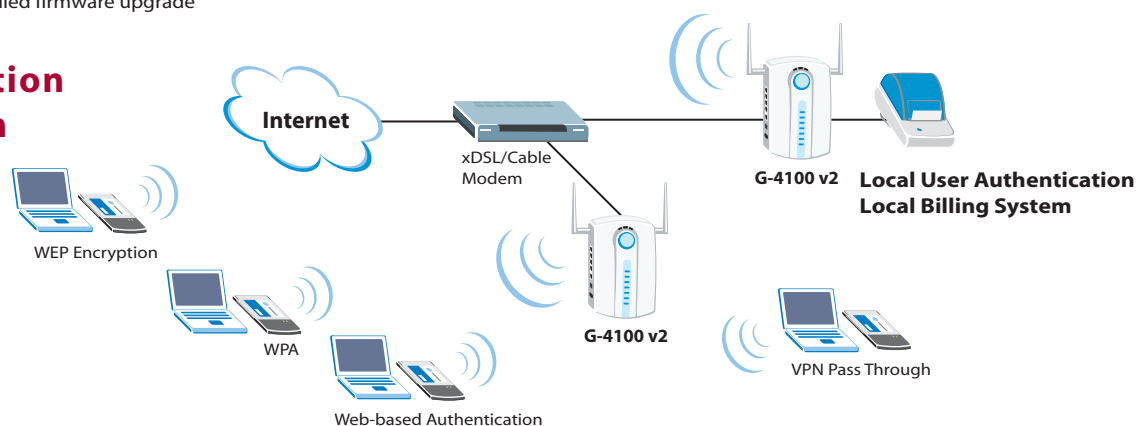

For more product information, visit us on the web www.ZyXEL.com

Corporate Headquarters
ZyXEL Communications Corp.
 Tel: +886-3-578-3942
 Fax: +886-3-578-2439
 Email: sales@zyxel.com.tw
 http://www.zyxel.com

ZyXEL Denmark A/S
 Tel: +45 39 55 07 00
 Fax: +45 39 55 07 07
 Email: sales@zyxel.dk
 http://www.zyxel.dk

ZyXEL France SARL
 Tel: +33 (0)4 72 52 97 97
 Fax: +33 (0)4 72 52 19 20
 Email: info@zyxel.fr
 http://www.zyxel.fr

ZyXEL Hungary
 Tel: +36-1-336-1646
 Fax: +36-1-325-9100
 Email: info@zyxel.hu
 http://www.zyxel.hu

ZyXEL North America
 Tel: +1-714-632-0882
 Fax: +1-714-632-0858
 Email: sales@zyxel.com
 http://www.us.zyxel.com

ZyXEL Poland
 Tel: +48 (22) 333 8250
 Fax: +48 (22) 333 8251
 Email: info@pl.zyxel.com
 http://www.pl.zyxel.com

ZyXEL Spain
 Tel: +34 902 195 420
 Fax: +34 913 005 345
 Email: sales@zyxel.es
 http://www.zyxel.es

ZyXEL UK Ltd.
 Tel: +44 (0) 1344 303044
 Fax: +44 (0) 1344 303034
 Email: sales@zyxel.co.uk
 http://www.zyxel.co.uk

ZyXEL Czech s.r.o.
 Tel: +420 241 091 350
 Fax: +420 241 091 359
 Email: info@zyxel.cz
 http://www.zyxel.cz

ZyXEL Finland Oy
 Tel: +358-9-4780 8400
 Fax: +358-9-4780 8448
 Email: sales@zyxel.fi
 http://www.zyxel.fi

ZyXEL Germany GmbH.
 Tel: +49 (0) 2405-6909 0
 Fax: +49 (0) 2405-6909 99
 Email: sales@zyxel.de
 http://www.zyxel.de

ZyXEL Kazakhstan
 Tel: +7-327-2-590-699
 Fax: +7-327-2-590-689
 Email: sales@zyxel.kz
 http://www.zyxel.kz

ZyXEL Norway A/S
 Tel: +47 22 80 61 80
 Fax: +47 22 80 61 81
 Email: sales@zyxel.no
 http://www.zyxel.no

ZyXEL Russia
 Tel: +7 (095) 542-8920
 Fax: +7 (095) 542-8925
 Email: info@zyxel.ru
 http://www.zyxel.ru

ZyXEL Sweden A/S
 Tel: +46 (0) 31 744 77 00
 Fax: +46 (0) 31 744 77 01
 Email: sales@zyxel.se
 http://www.zyxel.se

ZyXEL Ukraine
 Tel: +380 44 494 49 31
 Fax: +380 44 494 49 32
 Email: sales@ua.zyxel.com
 http://www.ua.zyxel.com

